



Base station power supply 3U standard





Overview

The power supply complies with normal and abnormal transients per MIL-STD-704, and conforms with MIL-STD-810 environments per VITA 47.3 ECC4SL2 and is designed using NAVSO P-3641A derating guidelines.

The power supply complies with normal and abnormal transients per MIL-STD-704, and conforms with MIL-STD-810 environments per VITA 47.3 ECC4SL2 and is designed using NAVSO P-3641A derating guidelines.

M4162 is a military grade, 3U VPX, 28V DC-DC PSU card that provides six outputs per VITA 62 that is rated at 350W output power and 9-15 Joules of holdup for MIL-HDBK-704-8, LDC201 requirements. Features include: conduction cooling, reverse battery protection, internal EMI filters. DC input range is.

High-performance and extremely rugged VPX and CompactPCI power supplies from X-ES enable integrators to reduce the SWaP, cost, and complexity from their system. These power supplies have been designed and tested to a number of military standards, and feature 300 W of output power from a single 0.8.

These environmentally robust, conduction-cooled devices operate from a nominal 28V or 270V DC input, with standard VITA 62 output voltages ranging from 3.3 to 12V. The 3U models deliver up to 600W of power, and the 6U up to 1000W. Customers requiring different output voltages or power levels can.

WIENER VPX336 power supplies are conduction-cooled, commercial off-the-shelf (COTS) single-stage converters built to the ANSI/VITA 62.0 standard. Designed to fit standard VPX chassis as specified by VITA 46.0, they deliver high overall efficiency and support a wide input voltage range through.

Our AI beta will help you find out quickly. Fan: Quantity: 1 Noise Level: 55dB (A) (max.) Package Content: Package Includes: N785-CH12 3U 12-Slot Media Converter Chassis N785-CH75W-AC Power supply with 6 ft. power cord, NEMA 5-15P plug and glass-tube fuse (Input: 90-240V, 50/60 Hz, 2A; Output: 12V.

We are a leading provider of VPX power supplies for the rugged embedded market. Our products meet open standards including VITA 62 with SOSA™-aligned options available. We offer an enormous range of off-the-shelf configurations and our



product architecture allows us to quickly adapt to meet.



Base station power supply 3U standard




Industrial 3U Rack Mount Triple Output Configurable Power Supply

Efficient 3U Triple Output Power Supply with customizable voltage options (3.3V, 5V, 12V, 24V, 28V, 48V) and power range from 100-10000 Watts. Ideal for industrial applications and rack ...

VPX 3U/DC Power Supply 360W

The VPX336 series is compliant with key military standards (MIL-STD-461, 704, 1275) and features an embedded microprocessor for real-time monitoring and control via I²C or USB. ...

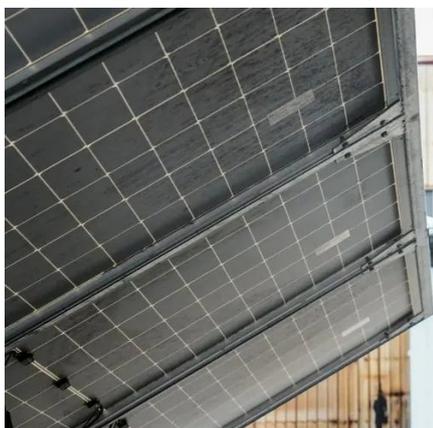

VPX VITA 62 Solutions

Designed to meet MIL-STD-461F, -704F, -810G and -1275. 3U and 6U solutions available SOSA-aligned. Wide input voltage (18-50VDC) and ...

Industrial 3U Rack Mount Triple Output Configurable Power Supply

Designed for Industrial Rack Mount Applications In Single or Three Phase Options. The VERSA-POWER Series TM is a 3U Power Supply that Provides up to 10,000 Watts in a Triple Output. ...



[Rugged 3U VPX & 3U cPCI Embedded Power ...](#)

X-ES 3U VPX and 3U cPCI power supply modules are designed to VITA 62 standards and meet the rigors of high performance, deployed military ...



VITA 62 power supply

These environmentally robust, conduction-cooled devices operate from a nominal 28V or 270V DC input, with standard VITA 62 output voltages ranging from 3.3 to 12V. The 3U models ...



VPX VITA 62 Solutions

Designed to meet MIL-STD-461F, -704F, -810G and -1275. 3U and 6U solutions available SOSA-aligned. Wide input voltage (18-50VDC) and industry-leading power output - 800W (3U) & ...

[M4162 VITA 62 3U VPX DC-DC power supply. 350W](#)



The M4162 is a rugged, highly efficient, military grade 3U VPX 28V DC to DC power conditioner and holdup card with 9-15 Joules of holdup for MIL-HDBK-704-8, LDC201 requirements. ...



TAX FREE

Product Model
HJ-ESS-215A(100KW/215KWh)
HJ-ESS-115A(50KW/115KWh)

Dimensions
1600*1280*2200mm
1600*1200*2000mm

Rated Battery Capacity
215KWH/115KWH

Battery Cooling Method
Air Cooled/Liquid Cooled



Rugged 3U VPX & 3U cPCI Embedded Power Supplies

X-ES 3U VPX and 3U cPCI power supply modules are designed to VITA 62 standards and meet the rigors of high performance, deployed military applications.

270V 3U 750W

Rantec's 270V 3U 750W high performance dual output defense power supply is developed in alignment with the SOSATM Technical Standard and addresses the needs of today's military ...



VITA 62 power supply

These environmentally robust, conduction-cooled devices operate from a nominal 28V or 270V DC input, with standard VITA 62 output voltages ...

3u rack mount power supply , Newegg



Search Newegg for 3u rack mount power supply.
Get fast shipping and top-rated customer service.



[M4013 VITA 62 VPX 3U power supply, 350W](#)

M4013 is a military grade 3U VPX, 28V DC-DC PSU card that provides six outputs per VITA 62 and is rated at 350W output power. Features include: conduction cooling, 0.8" pitch, fast ...





Contact Us

For catalog requests, pricing, or partnerships, please visit:

<https://asimer.es>

Phone: +34 910 56 87 42

Email: info@asimer.es

Scan the QR code to access our WhatsApp.

