




# Manufacturer of 2MW Photovoltaic Containers for Sports Venues





## Manufacturer of 2MW Photovoltaic Containers for Sports Venues

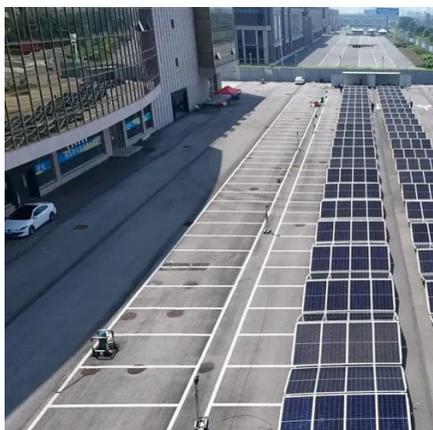

### Benchmade 1100-14 Tactical Pen

From Law Enforcement and Public Safety to elite Military troops, our obligation is still the same: The best tools for the job. Imagine what they can do in your world. Discontinued by the ...

### Full text of Commercial and Financial Chronicle : May 21, 1956

The net proceeds received from the sale of the series 1956! bonds, together with funds in the company's treasury, have been used to retire those bank loans. - dividends as manufacturer ...



### INTRODUCED 2

10 34. 33. Information of a proprietary or confidential nature disclosed by a health carrier or pharmacy 311 benefits manager pursuant to § 38.2-3407.15:6, a wholesale distributor ...

### Benchmade 1100 Series Tactical Pen

Benchmade 1100 Series Tactical Pen is an elegant, highly useful writing instrument that does more than put ink on paper. Designed with an ergonomic knurling pattern, this ...



[1100 Aluminum Alloy , Alloy Data Sheet and Properties](#)

Aluminum 1100 is one of the most widely used alloys, with excellent forming properties, especially in the fully soft, annealed temper. It may be suitable for applications that require bending, ...



[Supplement 3 Estimating the capacity of storage facilities](#)

2.5.7 Refrigerators and freezers ators and freezers are published in the WHO PQS catalogue. For non-qualified products, and where manufacturer's data are n Figure 4 Measuring capacity ...

12.8V6Ah

- Nominal voltage (V):12.8
- Nominal capacity (Ah):6
- Rated energy (WH):76.8
- Maximum charging voltage (V):14.6
- Maximum charging current (A):6
- Floating charge voltage (V):13.6-13.8
- Maximum continuous discharge current (A):10
- Maximum peak discharge current @10 seconds (A):20
- Maximum load power (W):100
- Discharge cut-off voltage (V):10.8
- Charging temperature (°C):-50
- Discharge temperature (°C):-20-+60
- Working humidity: <math>\leq 95\%</math> RH (non condensing)
- Number of cycles (25 °C, 0.5c, 100%DoD): >2000
- Cell combination mode: 32700-4s1p
- Terminal specification: T2 (6.3mm)
- Protection grade: IP65
- Overall dimension (mm):50\*70\*107mm
- Reference weight (kg):0.7
- Certification: un38.3/msds



**Aluminum Alloy 1100 , McMaster-Carr**

Choose from our selection of aluminum alloy 1100, including multipurpose 6061 aluminum, corrosion-resistant aluminum, and more. Same and Next Day Delivery.

**SODECA**



Roof mounted multifunctional extract fans for large airflows & nbsp; Manufacturer SODECA, SLU  
Description Roof mounted multifunctional extract fans for large airflows - HTMH-125-4T/9-20 ...



### **LiPo Batteries**

For over 20 years we've specialized in LiPo and Lithium ion batteries designed specifically for drones, unmanned vehicles, autonomous systems (UAVs, UGVs, AUVs) and robotic ...



## Contact Us

---

For catalog requests, pricing, or partnerships, please visit:

<https://asimer.es>

Phone: +34 910 56 87 42

Email: [info@asimer.es](mailto:info@asimer.es)

Scan the QR code to access our WhatsApp.

